

Installation Instructions

This Package includes:

- ✓ Filter Cartridge
- ✓ Instruction Manual




NOTE: To reduce the risk associated with property damage due to water leakage, read and follow instructions before installation and use of this filter.

Installation and use MUST comply with all state and local plumbing codes.


- ✓ Protect from freezing, remove filter cartridge when temperatures are expected to drop below 33F (1C).
- ✓ Do not install systems in areas where ambient temperatures may go above 100F (38C) or below 40F (4C).
- ✓ Do not install if water pressure exceeds 100 psi (689 kPa). If your water pressure exceeds 80 psi (552 kPa) you should install a pressure limiting valve. Contact a plumbing professional if you are uncertain how to check your water pressure.
- ✓ The filter cartridge should be replaced every 12 months or at a rated capacity of 350 gallons (1325L), or when indicated by the system monitor or when noticeable reduction in flow occurs.

- STEP 1** Remove Filter Cartridge from appliance by rotating to the left (CCW) ½ turn.
- STEP 2** Remove Protective Cap & Tape from end of NEW Filter Cartridge.
- STEP 3** Install NEW Filter Cartridge into the appliance by rotating to the right (CW) ½ turn.
- STEP 4** Press COLD button on appliance and flush 2 gallons (7.5L) of water from system.
- STEP 5** CHECK FOR LEAKS around the appliance and filter.
- STEP 6** Reset Filter Timer according to appliance instructions.

Remove Filter from appliance



Install NEW Filter in appliance




KUL Ultimate Replacement Filter

Your new KUL Ultimate replacement filter gives you up to 350 gallons or 12 months of filtered water. This filter should be changed after 12 months of use.

Replacement Part # 9635. (Call 833-866-0560 or visit www.verykul.com)
For use in the KUL-CT20 (KUL Filtration System).

WARNING: To reduce the risk associated with the ingestion of contaminants, do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts. Small parts remaining after installation may be a choke hazard. Discard Safely.

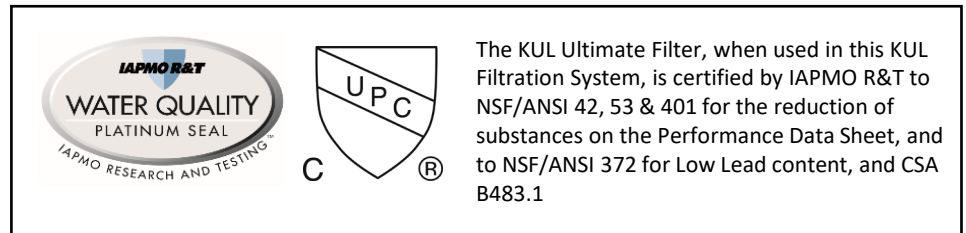

NOTE: If this device is not maintained and operated as specified in the Owners Manual, there is risk of exposure to contaminants. For more information, visit the manufacturer's website at www.verykul.com or the California State Water Resources Control Boards' website at www.waterboards.ca.gov

This system has been tested for the treatment of water containing pentavalent arsenic (also known as As(V), As(+5), or arsenate) at concentrations of 0.050 mg/L or less. This system reduces pentavalent arsenic but may not reduce other forms of arsenic. This system is to be used on water supplies containing a detectable free chlorine residual or on water supplies that have been demonstrated to contain only pentavalent arsenic. Treatment with chloramine (combined chlorine) is not sufficient to ensure complete conversion of trivalent arsenic to pentavalent arsenic. Please see the Arsenic Facts section for further information.

Contact Us: For Customer Service, replacement parts, or Technical Support Phone 833-866-0560 toll-free USA, 1-815-324-4445 Int'l, or visit verykul.com

Limited 30-Day Warranty

If your KUL Replacement Filter fails because of manufacturing defects within 30 days from the date of original purchase, we will provide a new filter without charge. Simply return the filter to the retailer and/or location where the filter was purchased with a copy of the "proof of purchase". If the filter is defective, it will be replaced.

This warranty does not cover filters that are improperly installed, damaged, abused, or used for other than the intended purpose. It doesn't include the cost of returning the filter to the retailer from where it was purchased, the labor to remove, install, or diagnose the failure, additional parts used, and does not include any incidental or consequential damages.